


uLogin

Member Login Control for Umbraco

Version 1.0.1

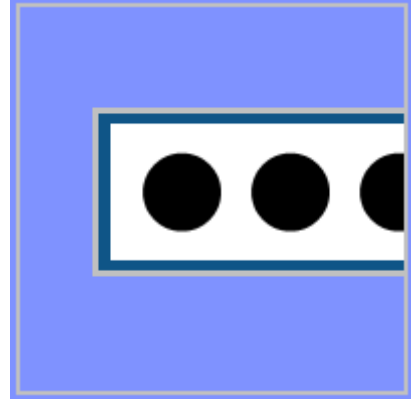

www.ampluscorp.com

Copyright © 2010 Amplus Corporation.
All Rights Reserved.

Description

uLogin is the member login control for Umbraco.

uLogin version 1.0.1 uses the cookies-based ASP.net forms authentication model implemented by Umbraco.

uLogin version 1.0.1 was developed and tested for Umbraco version 4.5.2 with ASP.net version 4. It has not been tested for use with any earlier Umbraco version.

Quick Start

Download uLogin_1.0.1.zip and save it to the local file system where Umbraco is installed.

Install the uLogin package by selecting Umbraco's "Install local package" feature in the "Developer" section of Umbraco, accept the license, and follow the instructions in the Umbraco user interface.

Create a member type from the "Member Types" option in the "Members" section of Umbraco.

Create a member from the "Members" option in the "Members" section of Umbraco.

Add the uLogin macro to the template of your choice from the "Templates" option in the "Settings" section of Umbraco.

Note: the uLogin macro must be enclosed in ASP.net form tags. If not already present in your template, you can add "<form id="form1" runat="server">" before the uLogin macro and add "</form>" after the uLogin macro.

That is all that's required to configure a functioning login scenario for your Umbraco Web site.

uLogin Macro Parameters

uLogin is functional without assigning any macro parameters. The default language is English and the default messages are sufficient for a functioning membership system.

uLogin is highly configurable and can be customized to meet the needs of Web applications requiring specific messages and designs.

uLogin can even be used in multi-language Umbraco Web sites that take advantage of its language dictionary functionality.

The parameters that affect messages displayed by the uLogin control are listed here along with the default settings (in parentheses) when no values are supplied:

notLoggedInMessage ("Login")

loginText ("Login Name")

loginReqError ("*")

passwordText ("Password")

passwordReqError ("*")

rememberMeText ("Remember Me On This Computer")

rememberMeTextAlign ("Right")

loginButtonText ("Login")

failureText ("Your login attempt was not successful. Please try again.")
loggedInMessage ("Hello")
logoutText ("Logout")
returnUrl ("")
loginNameBeforeMessage ("False")
loginNameAfterMessage ("False")

For Umbraco Web sites that take advantage of its language dictionary functionality, simply assign a "#" with the name of the parameter to use the dictionary key of the same name.

For example, to enable uLogin to retrieve the dictionary key named "Login" for the Login parameter, set the parameter value to "#Login". The language dictionary value for the default language will be rendered by that parameter.

Appearance and Styling

Styling the uLogin control is done with CSS. Each component of the uLogin control is rendered with a unique id attribute and a CSS style attribute. To discover the IDs and Styles associated with each component, use the "view source" option of your Web browser.

License

The MIT License (MIT)

Copyright © 2010 Amplus Corporation.

All Rights Reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Version History

Version	Date	Comments
1.0.1	December 7, 2010	Initial public release.